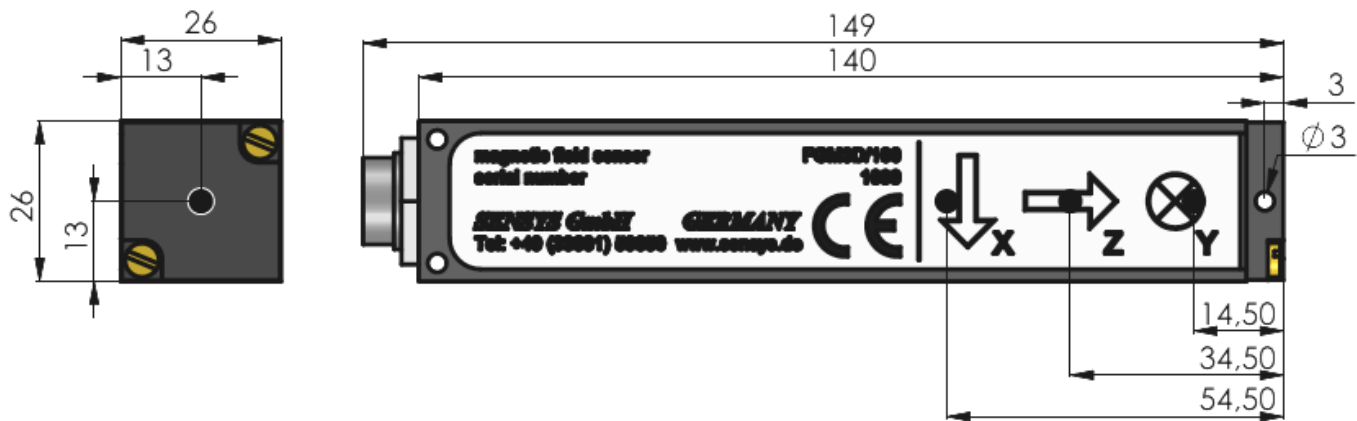
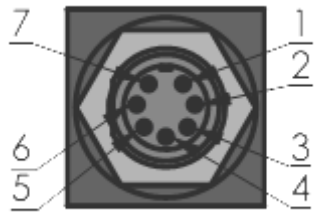
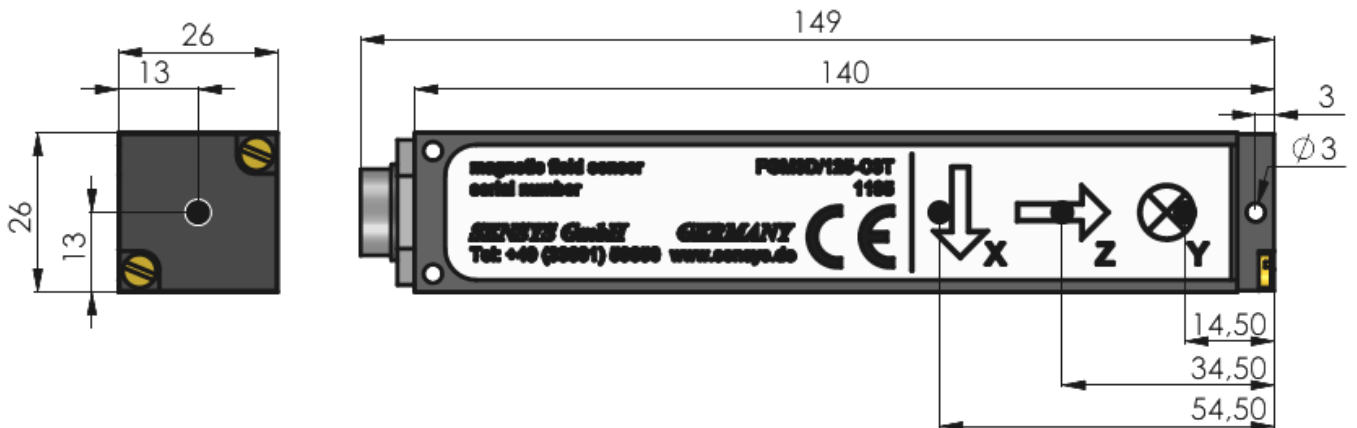
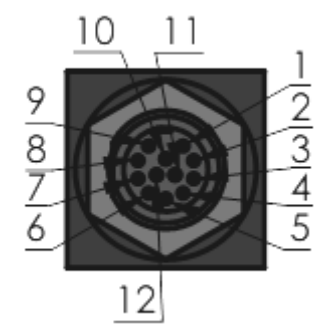
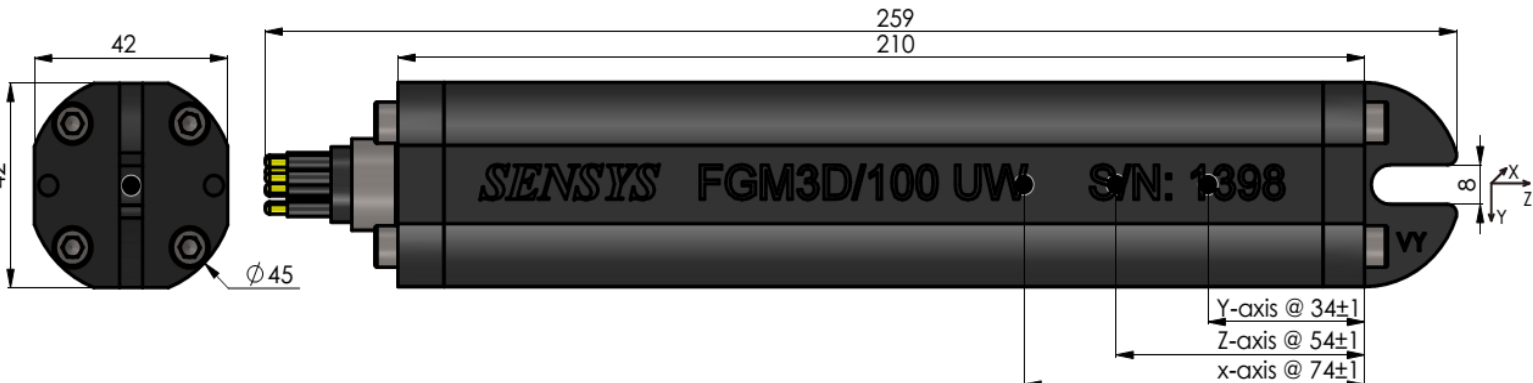
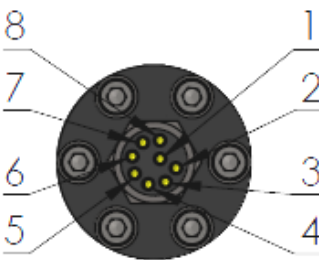


## SENSYS FGM3D Matrix of Technical Parameters



Parameters	Standard version							Calibration version	Submersible version
	FGM3D/4	FGM3D/75	FGM3D/100	FGM3D/125	FGM3D/250	FGM3D/500	FGM3D/1000	FGM3D/125-C3T	FGM3D UW
Measurement range	±4,000 nT	±75,000 nT	±100,000 nT	±125,000 nT	±250,000 nT	±500,000 nT	±1,000,000 nT	± 125,000 nT	See standard version
Point of reference single axes	See figure 1 or 4 next pages (14.5/34.5/54.5mm from edge)							See figure 2 next page (14.5/34.5/54.5mm from edge)	See figure 3 next page (34/54/74mm from edge)
Point of reference total intensity	34.5 mm from edge								54mm from edge
Declination between axes	≤ ±0.5°								
Declination total	≤ ±1°								
Resolution	< 150 pT								
Noise [0.1 ... 10 Hz]	< 15 pT <sub>rms</sub> /√Hz @0.1...10Hz								
Cut off frequency (bandwidth)	2 kHz (DC...2 kHz)								
Temperature drift	≤ ± 0.3 nT/K								
Zero error	≤ ±5 nT								
Relative error of measurement	±0.1 %				±0.5 %			±0.1 %	See standard version
Stability	< 5 nT								
Linearity	< 20 ppm								
Sensitivity	2.5 V/μT	0.1 $\bar{3}$ ... V/μT	0.1 V/μT	0.08V/μT	0.04V/μT	0.02V/μT	0.01V/μT	0.08 V/μT	See standard version
Additional winding (compensation)	n.a.							6.3 mA / 70 μT (max. 10mA) incl. calibration protocol	n.a.
Calibration jump	n.a.							-10 μT (per axis)	n.a.
Supply voltage	±12 V ... ±15 V								
Current consumption	±26 mA							max. ±40 mA; typ. ±30 mA	See standard version
Output	±10 V @FS								
Output impedance	< 1 Ω								
Operating temperature	-20 °C to +75 °C								
Storage temperature	-40 °C to +80 °C								
Dimensions	See housing types next pages								cylindrical, Ø45mm x 259mm
Weight w/o cable / Volume	112g							130g	430g / 0.28 l
Ingress protection	IP65								IP68K down to 100m
Vibration stability	BV044 (in parts)								
<b>Options</b>									
Low noise / improved resolution	≤ 8 pT <sub>rms</sub> /√Hz / < 70 pT				n.a.			≤ 8 pT <sub>rms</sub> /√Hz / < 70 pT	See standard version
Improved orthogonality	Declination between axes: ≤ ±0.1° / declination total: ≤ ±0.12°								
Extended bandwidth	n.a.	3 kHz / 4 kHz			n.a.			n.a.	See standard version
Customized housing	Possible features: square, cylindrical, additional mounting points, specific material, color, etc.								Dependent on required depth rating
Cabling									
Digitizer / Recorder									

FAQs	
Scope of supply	Standard pricing includes analogue sensor <b>without</b> options, specific housing or any cabling
Dual use	The low noise options might improve sensor characteristics towards a dual use rated device (military/threatening application), please check with authorities about applicable categories
Packaging & Shipment	All sensors are packed for save transport at no additional costs and pick up from SENSYS premises is free of charge, whereas shipping to customers premises is at extra cost
Customs	Custom process might vary depended on final customer destination and might require additional guarantees and efforts to be charged on top

# SENSYS FGM3D Matrix of Housing types and Pin Layout (I)

Sensor	Schematic view of sensor	Connector layout	Pin layout version																																							
	Side view with dimension, reference edge and centre of sensing elements (●)	Number of pins	Assignment of pins																																							
FGM3D	 <p style="text-align: center;">Figure 1</p>		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Pin</th> <th>Signal</th> <th>Color</th> </tr> </thead> <tbody> <tr><td>1</td><td>0V</td><td>Black</td></tr> <tr><td>2</td><td>-15V</td><td>Brown</td></tr> <tr><td>3</td><td>+15V</td><td>Red</td></tr> <tr><td>4</td><td>B<sub>COM</sub></td><td>Orange</td></tr> <tr><td>5</td><td>B<sub>X</sub></td><td>Yellow</td></tr> <tr><td>6</td><td>B<sub>Y</sub></td><td>Green</td></tr> <tr><td>7</td><td>B<sub>Z</sub></td><td>Blue</td></tr> </tbody> </table> <p style="text-align: center;">Weight: 112g</p>	Pin	Signal	Color	1	0V	Black	2	-15V	Brown	3	+15V	Red	4	B <sub>COM</sub>	Orange	5	B <sub>X</sub>	Yellow	6	B <sub>Y</sub>	Green	7	B <sub>Z</sub>	Blue															
Pin	Signal	Color																																								
1	0V	Black																																								
2	-15V	Brown																																								
3	+15V	Red																																								
4	B <sub>COM</sub>	Orange																																								
5	B <sub>X</sub>	Yellow																																								
6	B <sub>Y</sub>	Green																																								
7	B <sub>Z</sub>	Blue																																								
FGM3D/125-C3T	 <p style="text-align: center;">Figure 2</p>		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Pin</th> <th>Signal</th> <th>Color</th> </tr> </thead> <tbody> <tr><td>1</td><td>Z<sub>TEST</sub></td><td>White</td></tr> <tr><td>2</td><td>Y<sub>TEST</sub></td><td>Grey</td></tr> <tr><td>3</td><td>Z<sub>OUT</sub></td><td>Blue</td></tr> <tr><td>4</td><td>Y<sub>OUT</sub></td><td>Green</td></tr> <tr><td>5</td><td>X<sub>OUT</sub></td><td>Yellow</td></tr> <tr><td>6</td><td>OUT</td><td>Orange</td></tr> <tr><td>7</td><td>+15V</td><td>Red</td></tr> <tr><td>8</td><td>-15V</td><td>Brown</td></tr> <tr><td>9</td><td>0V</td><td>Black</td></tr> <tr><td>10</td><td>X<sub>TEST</sub></td><td>Purple</td></tr> <tr><td>11</td><td>CAL<sub>TEST</sub></td><td>Brown/white</td></tr> <tr><td>12</td><td>TEST</td><td>White/black</td></tr> </tbody> </table> <p style="text-align: center;">Weight: 130 g</p>	Pin	Signal	Color	1	Z <sub>TEST</sub>	White	2	Y <sub>TEST</sub>	Grey	3	Z <sub>OUT</sub>	Blue	4	Y <sub>OUT</sub>	Green	5	X <sub>OUT</sub>	Yellow	6	OUT	Orange	7	+15V	Red	8	-15V	Brown	9	0V	Black	10	X <sub>TEST</sub>	Purple	11	CAL <sub>TEST</sub>	Brown/white	12	TEST	White/black
Pin	Signal	Color																																								
1	Z <sub>TEST</sub>	White																																								
2	Y <sub>TEST</sub>	Grey																																								
3	Z <sub>OUT</sub>	Blue																																								
4	Y <sub>OUT</sub>	Green																																								
5	X <sub>OUT</sub>	Yellow																																								
6	OUT	Orange																																								
7	+15V	Red																																								
8	-15V	Brown																																								
9	0V	Black																																								
10	X <sub>TEST</sub>	Purple																																								
11	CAL <sub>TEST</sub>	Brown/white																																								
12	TEST	White/black																																								
FGM3D UW II	 <p style="text-align: center;">Figure 3</p>		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Pin</th> <th>Signal</th> <th>Color</th> </tr> </thead> <tbody> <tr><td>1</td><td>Shield</td><td>Shield</td></tr> <tr><td>2</td><td>GND</td><td>White</td></tr> <tr><td>3</td><td>-15V</td><td>Red</td></tr> <tr><td>4</td><td>+15V</td><td>Green</td></tr> <tr><td>5</td><td>Return GND</td><td>Grey</td></tr> <tr><td>6</td><td>B<sub>X</sub></td><td>Blue</td></tr> <tr><td>7</td><td>B<sub>Y</sub></td><td>White/black</td></tr> <tr><td>8</td><td>B<sub>Z</sub></td><td>Black</td></tr> </tbody> </table> <p style="text-align: center;">Weight: 430 g Volume: 0.28 L</p>	Pin	Signal	Color	1	Shield	Shield	2	GND	White	3	-15V	Red	4	+15V	Green	5	Return GND	Grey	6	B <sub>X</sub>	Blue	7	B <sub>Y</sub>	White/black	8	B <sub>Z</sub>	Black												
Pin	Signal	Color																																								
1	Shield	Shield																																								
2	GND	White																																								
3	-15V	Red																																								
4	+15V	Green																																								
5	Return GND	Grey																																								
6	B <sub>X</sub>	Blue																																								
7	B <sub>Y</sub>	White/black																																								
8	B <sub>Z</sub>	Black																																								

## SENSYS FGM3D Matrix of Housing types and Pin Layout (II)

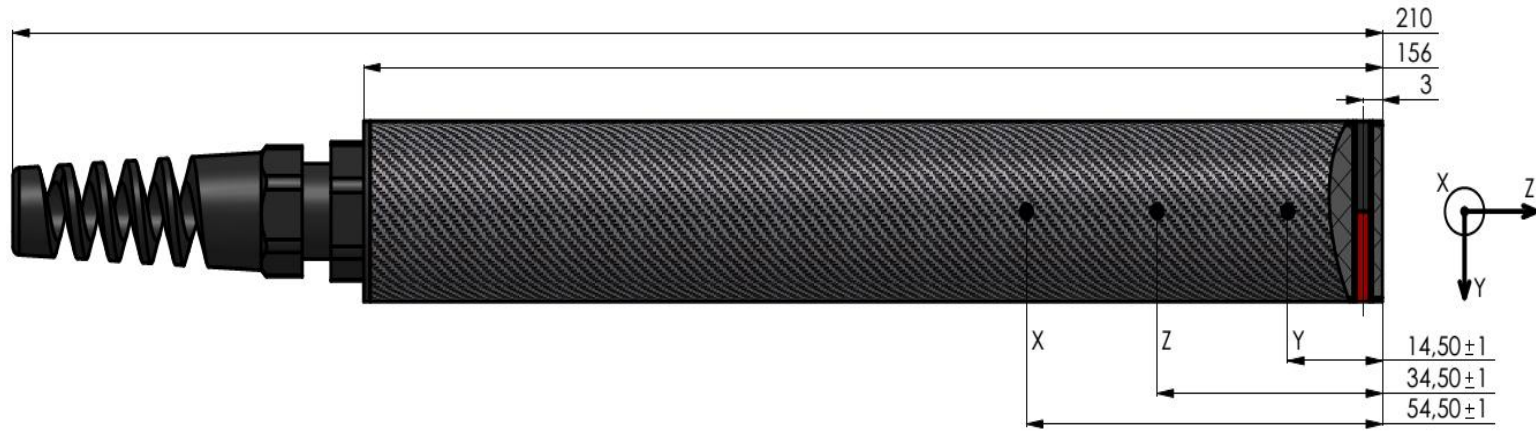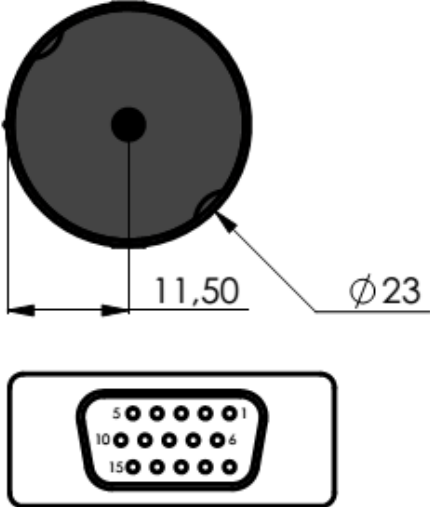	Schematic view of sensor	Connector layout	Pin layout version																											
Sensor	Side view with dimension, reference edge and centre of sensing elements (●)	Number of pins	Assignment of pins																											
FGM3D „Slim“	 <p style="text-align: center;">Figure 4</p>		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Pin</th> <th>Signal</th> <th>Color</th> </tr> </thead> <tbody> <tr><td>1</td><td>B<sub>COM</sub></td><td>Grey</td></tr> <tr><td>2</td><td>B<sub>X</sub></td><td>Yellow</td></tr> <tr><td>3</td><td>B<sub>Y</sub></td><td>Green</td></tr> <tr><td>4</td><td>B<sub>Z</sub></td><td>Blue</td></tr> <tr><td>11</td><td>0V</td><td>Black</td></tr> <tr><td>12</td><td>-15V</td><td>Brown</td></tr> <tr><td>13</td><td>+15V</td><td>Red</td></tr> <tr><td>14</td><td>Shield</td><td></td></tr> </tbody> </table> <p style="text-align: center; margin-top: 20px;">Weight: 110g</p>	Pin	Signal	Color	1	B <sub>COM</sub>	Grey	2	B <sub>X</sub>	Yellow	3	B <sub>Y</sub>	Green	4	B <sub>Z</sub>	Blue	11	0V	Black	12	-15V	Brown	13	+15V	Red	14	Shield	
Pin	Signal	Color																												
1	B <sub>COM</sub>	Grey																												
2	B <sub>X</sub>	Yellow																												
3	B <sub>Y</sub>	Green																												
4	B <sub>Z</sub>	Blue																												
11	0V	Black																												
12	-15V	Brown																												
13	+15V	Red																												
14	Shield																													